



V1.1

--
--
--

KE-GT(80-110)KTL4







1		6
2		10
3		16
4		24
5		25
6		29
7		31
8		32

1

1.1

▪

▪

▪

▪

▪

▪

▪

▪

▪

▪

▪



-
-
-

1.2



1.3



[illegible]

2

2.1







2.2






2.3



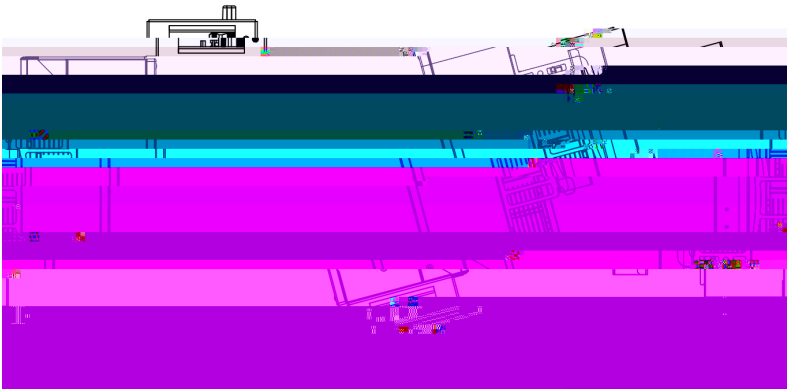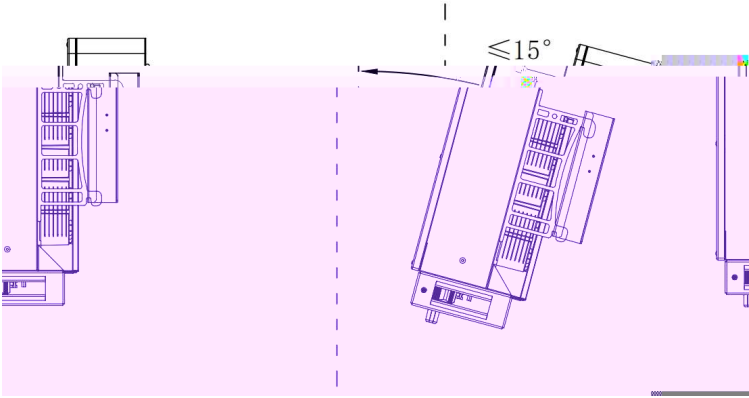





2.4

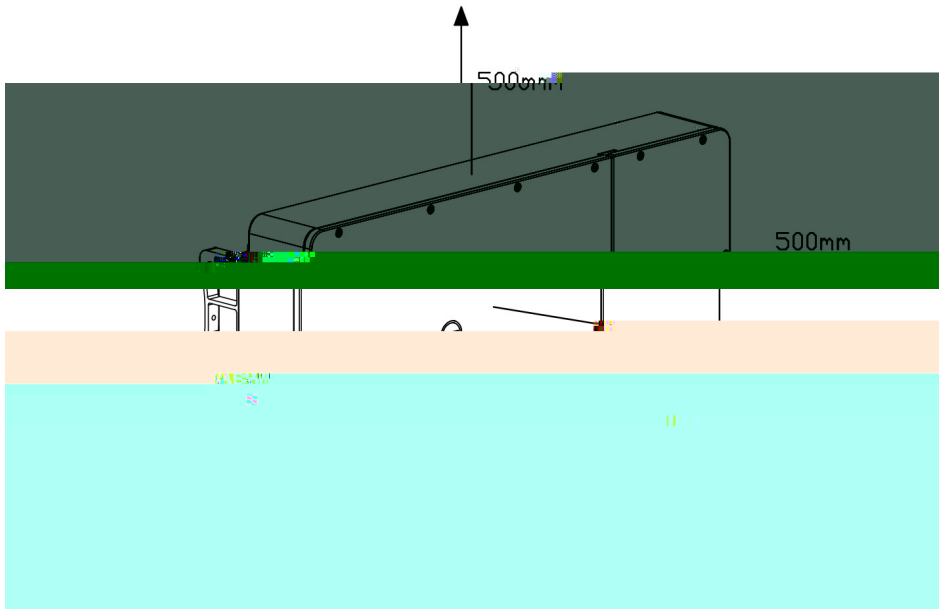

2.5



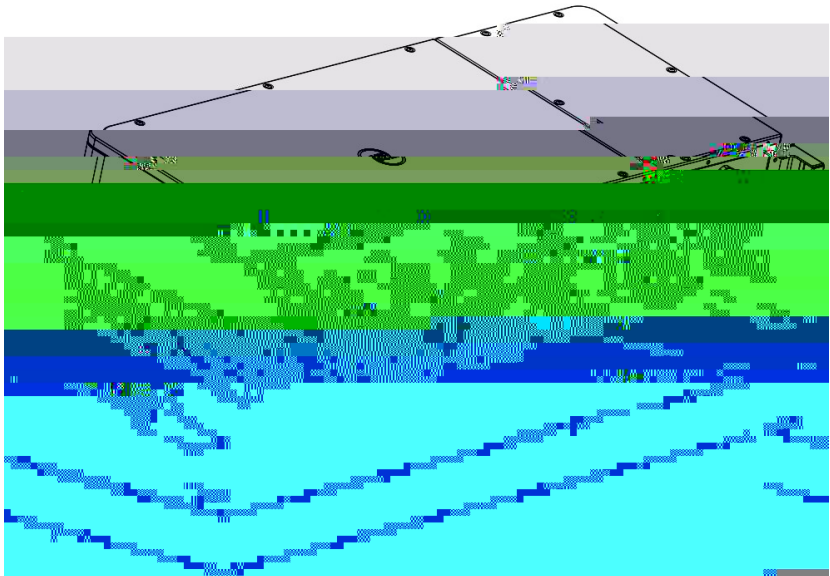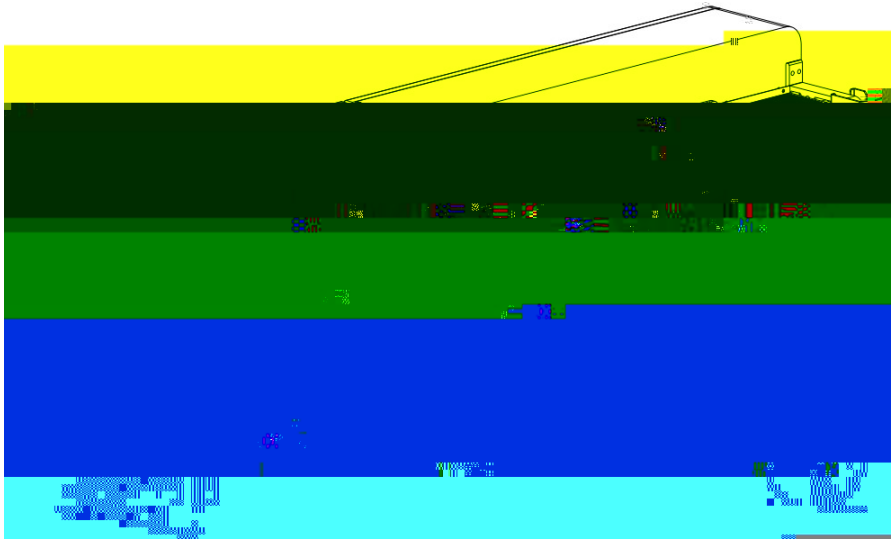



3



3.1


3.2





- ☞
- ☞
- ☞
- ☞
- ☞

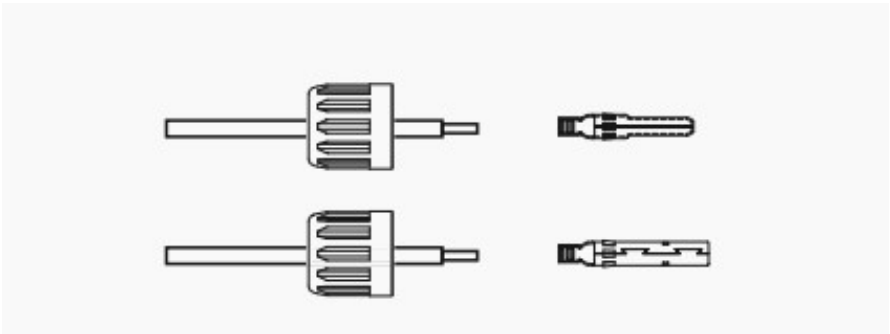
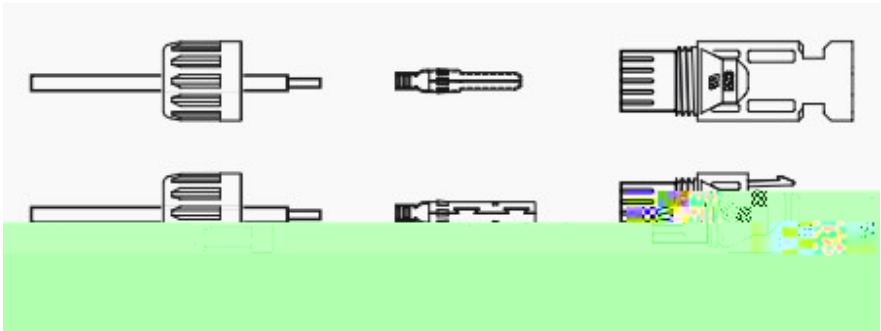


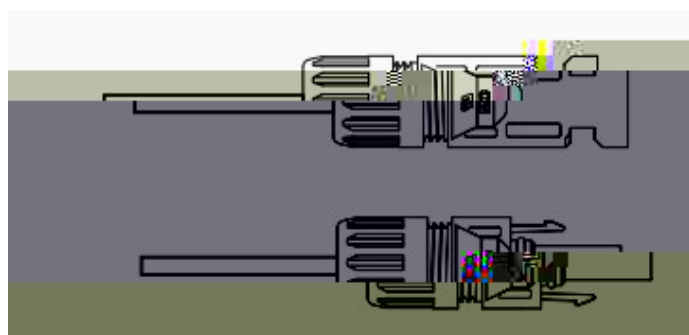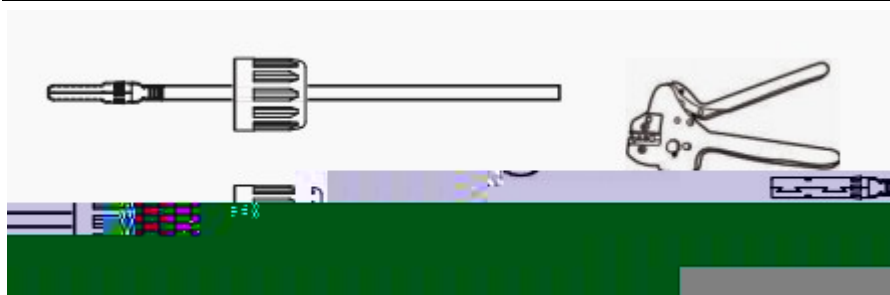

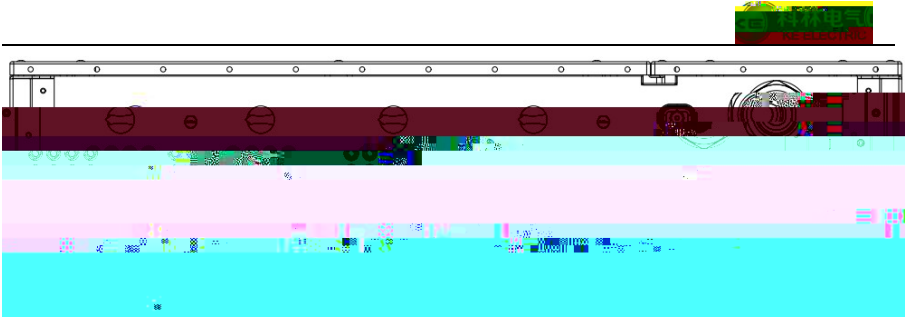

3.3

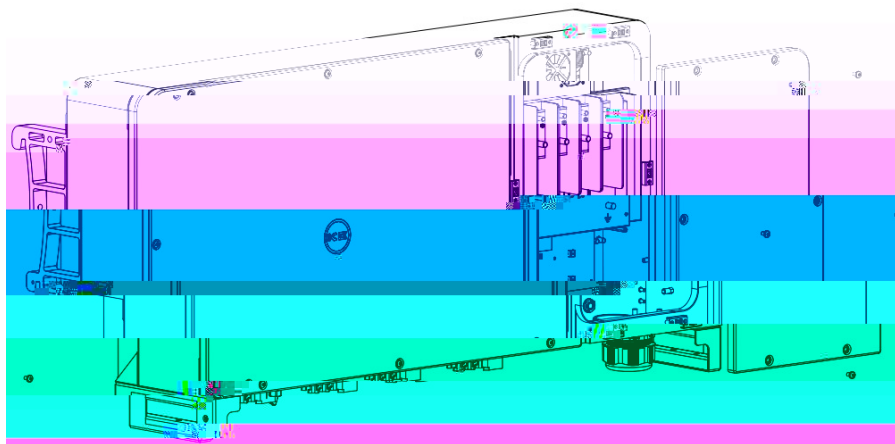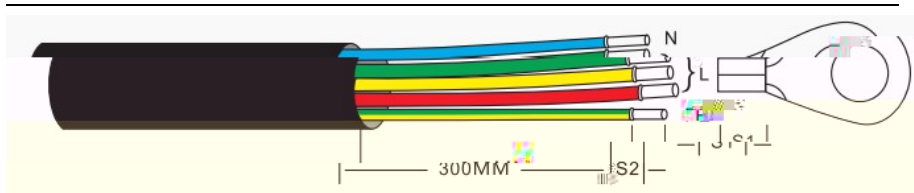

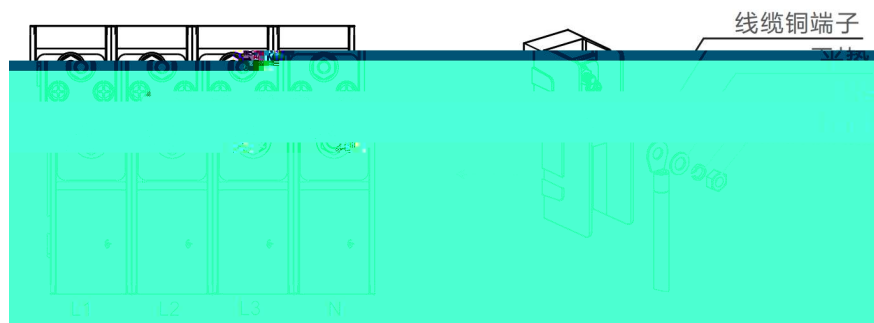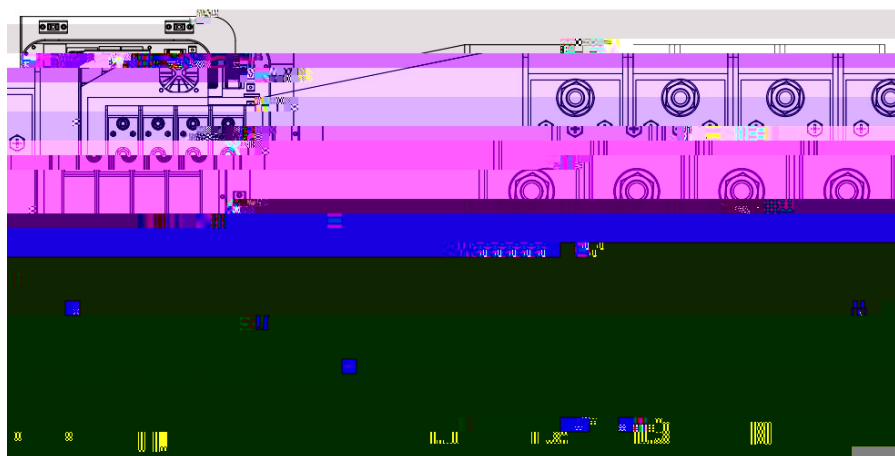


3.4



重要:

对于并联的多个逆变器，所有逆变器应连接到同一接地点，以确保接地线等电位连接。

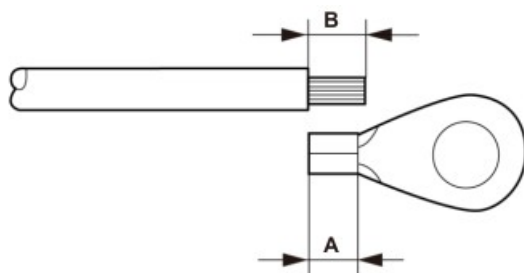

A


重要:

A (OT线缆端子压接区域) 长2mm~3mm。



重要:



P (OT线缆剥皮长度) 长2mm~3mm。

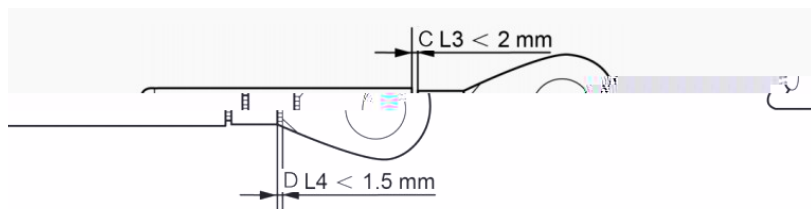



重要:

将端子压接到线缆后，检查连接以确保端子牢固地压接到线缆上。

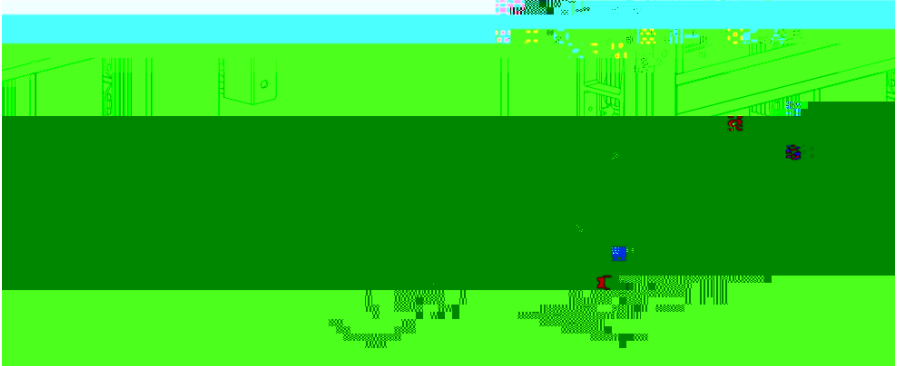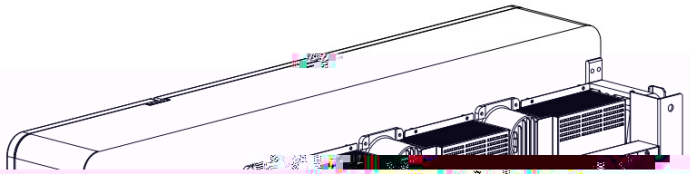

重要:

为提升摩擦性能，安装时请

4

4.1

4.2

5

5.1



09:11

注册

您好，
欢迎登陆光伏云管家

手机号/用户名

密码

☐ 我已阅读并同意 [隐私协议](#)

忘记密码？

☐ 记住

09:11

注册

请输入手机号


获得验证码

输入验证码

请输入6~12位密码


再次输入密码

注册

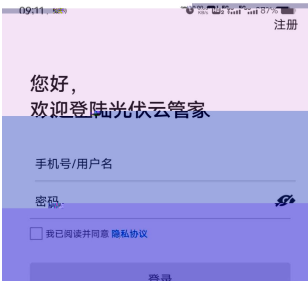



5.2

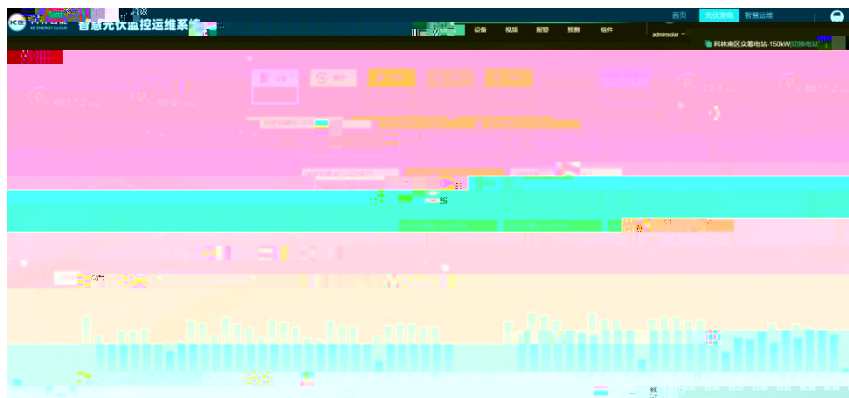

[illegible]

[illegible]

7



